


Blue Line Defense AI EDGE GPU Computer DPC-2100



Model 1

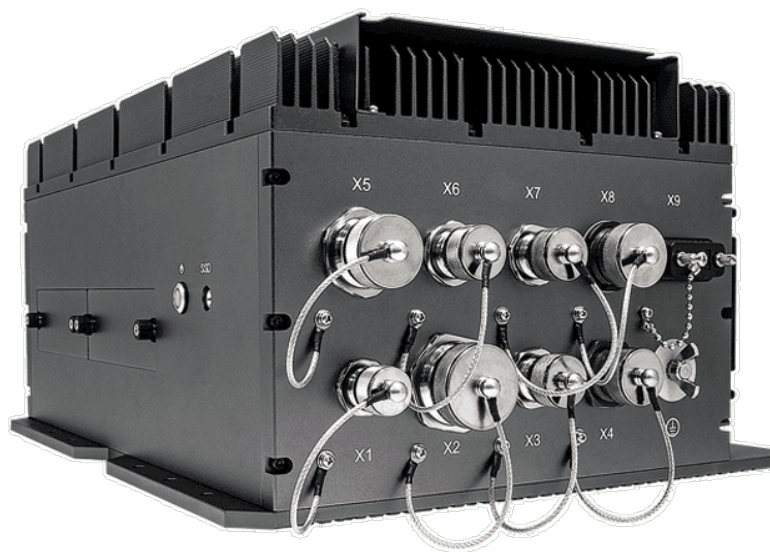

BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Blue Line Defense AI EDGE GPU Computer DPC-2100



Model 1



Model 1



Model 1



Model 2

Blue Line Defense AI EDGE GPU Computer DPC-2100



Highlights

Blue Line Defense AI EDGE GPU Computer DPC-2100 is a robust AI Inference server-class platform engineered to withstand challenging environments. This ruggedized solution is equipped with an Intel Xeon Processor, offering up to 20 Cores, and is enhanced with NVIDIA technology.

With its high-bandwidth networks and cutting-edge features, the DPC-2100 delivers exceptional performance for data-intensive industries like medical, defense, and transportation. Its Ethernet connectivity and secure smart network interface card (SmartNIC) bolster performance, security, virtualization, SDN/NFV, big data, and machine

Blue Line Defense AI EDGE GPU Computer DPC-2100

learning capabilities for data center applications.

Reduce cost and time spending with our global partner model based on your specific requirements. Let Blue Line take responsibility for delivery on time. Blue Line's ultimate goal is to help our customers get peace of mind by handling all relevant details such as securing the right configuration, software setup, mounting, packaging, labeling etc. Ask for references from your industry.

- Military AI Edge GPU Computer
- IP65 certified
- MIL-STD-461/810G certified
- Ultra high performance Intel Xeon Ice Lake-D
- NVIDIA MXM-GPU Quadro RTX4500 5888 CUDA
- 2 x 25GbE SFP28 and 2 x 10GbE
- Up to 512GB LRDIMM and 2 x NVMe PCIe generation 4.0 U.2
- Dual removable anti-drop SSD w/hardware secure erase (AES) by option
- Wide temp -20 to 60°C
- Build-to-order configured to your requirements

Specifications

Model Type

Rugged AI box PC

Form Factor

Compact

Construction

Aluminium

Cooling



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Blue Line Defense AI EDGE GPU Computer DPC-2100

IP65 sealed with external smart fan

Environment

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Humidity	5% to 95%, non-condensing

Certification

CE and FCC
MIL-STD-810G thermal, shock, vibration, humidity
MIL-461 EMC/EMI
MIL-STD-1275

Processor

CPU model 1, 2 & 3	Intel Xeon D-2733NT, 8C/16T, 2.1GHz, max turbo up to 3.2GHz, 80W TDP
Option for	Intel Xeon D-2775TE, 16C/32T, 2.0GHz, max turbo up to 3.1GHz, 100W TDP
Option for	Intel Xeon D-2796NT, 20C/40T, 2.0GHz, max turbo up to 3.1GHz, 120W TDP
GPU model 1 & 2	1 x Nvidia RTX A4500 16GB DDR6 MXM PCIe x16 generation 4.0, 125W TDP Total: 5888 CUDA cores, 184 Tensor cores and 80 RT cores
GPU model 3	2 x Nvidia RTX A4500 16GB DDR6 MXM PCIe x16 generation 4.0, 125W TDP Total: 11.776 CUDA cores, 368 Tensor cores and 160 RT cores

Chipset

SoC

RAM

4 x DDR4 sockets, supports 2933 MHz SDRAM up to 256GB RDIMM / 512GB LRDIMM

Blue Line Defense AI EDGE GPU Computer DPC-2100

Storage

2 x 2TB 2.5" swappable SATA drive with AES function

Input / Output

Model 1

- X1 1x CAN BUS TVS07RF-9-98S connector
- X2 1x 10GbE(SFP+) LCFTV70NN connector
- X3 1x 10GbE TVSS07RF-11-35SA connector (Intel X550-AT2)
- X4 1x DC-IN TV07RW-13-4P connector
- X5 4x RS232/422/485 24FD35SN connector
- X6 1x GbE TVS07RF-11-35S-LC connector (Intel i350-AM4)
- X7 1x GbE TVS07RF-11-35S-LC connector (Intel i350-AM4)
- X8 1x USB3.0 USB3FTV7AZNF312 connector
- X9 1x VGA D-sub 15 connector with waterproof cap

Model 2

- X1 DC In connector
- X2 1 x USB3.0 Amphenol USB3FTV7AZNF312 connector
- X3 1 x 1GBase-T TV07RW-13-98S connector (Intel i350-AM4)
- X4 1 x 1GBase-T TV07RW-13-98S connector (Intel i350-AM4)
- X5 1 x 10GBase-T M20 RJ45 CAT6A connector (Intel X550-AT2)
- X6 1 x 10GBase-T M20 RJ45 CAT6A connector (Intel X550-AT2)
- X7 1 x 100G fiber ethernet Amphenol FSI MPOFTV70ZNN (Nvidia ConnectX-6)
- VGA D-sub 15 connector with waterproof cap

Model 3

- X0 1 x USB 3.0 Amphenol USB3FTV7AZNF 312 connector
- X1 2 x 10GbE in 1 x 22-pin Amphenol TV07RW-13-35S (Intel X550-AT2)
- X2 1 x 1GBase-T TV07RW-13-98S connector (Intel i350-AM4)
- X3 1 x 1GBase-T TV07RW-13-98S connector (Intel i350-AM4)
- X4 1 x 1GBase-T TV07RW-13-98S connector (Intel i350-AM4)
- X5 DC In connector
- X6 1 x 10GBase-T M20 RJ45 CAT6A connector
- X7 1 x 10GBase-T M20 RJ45 CAT6A connector
- X8 1 x 25G fiber ethernet Amphenol FSI MPOFTV70ZNN (Intel SoC)
- X9 1 x 25G fiber ethernet Amphenol FSI MPOFTV70ZNN (Intel SoC)
- VGA D-sub 15 connector with waterproof cap



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Blue Line Defense AI EDGE GPU Computer DPC-2100

Operating System

Windows 10 / 11
Windows 10 IoT Enterprise
Linux

Power Supply

+18V to 36V DC-in

Power Consumption

TBD

Dimension and Weight

Dimension	W 405 x L 316 x H 195mm
Net weight	10kg
Gross weight	TBD

Warranty and After Sales Support

Standard 1 year (option for 3 years)



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com