




Open Frame Monitor Outdoor

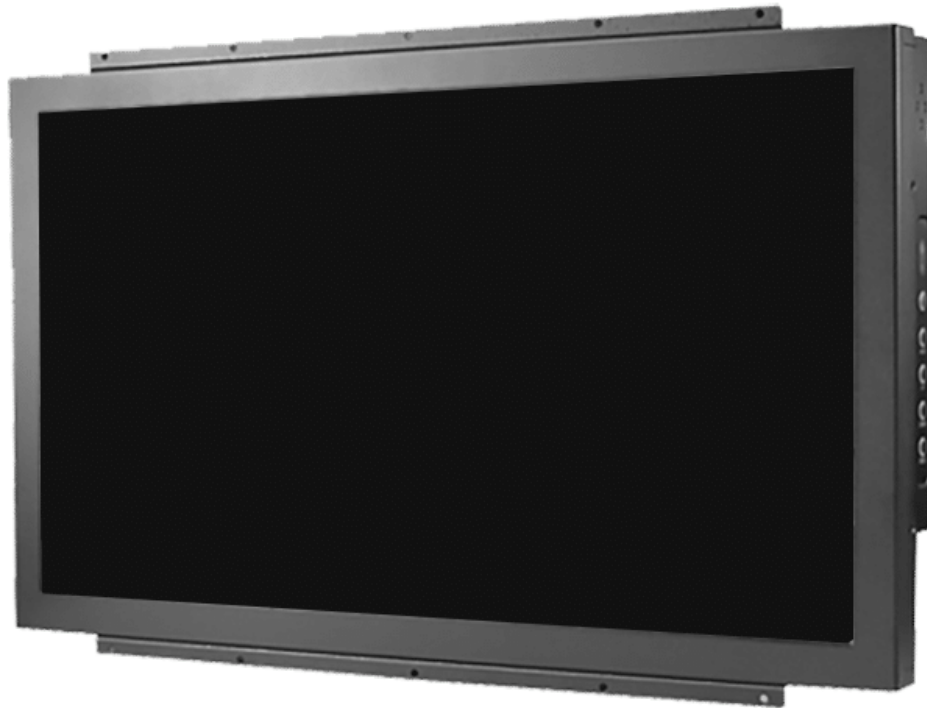

BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Open Frame Monitor Outdoor

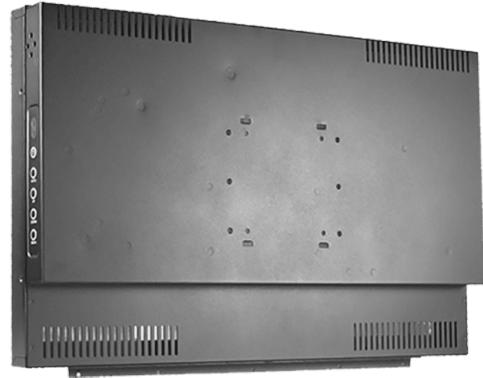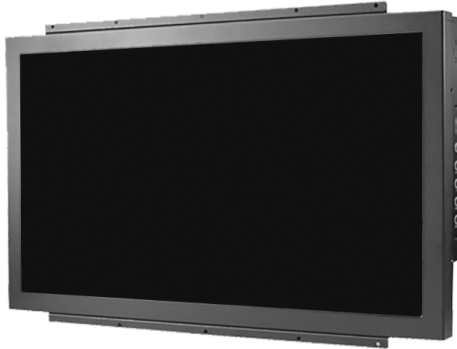

BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Open Frame Monitor Outdoor



Highlights

High brightness outdoor open frame monitor available in many sizes from 5.7" to 32" for integration in chassis or rear mount. Large range of options for improved outdoor performance. Touch firmware can be optimised to outdoor use, e.g. rain mode and support of gloves. Customisation according to application and environment. Benefit from our specialists and know-how.

Reduce cost and time spending with our global partner model based on your specific requirements. Let Blue Line take responsibility for delivery on time. Blue Line's ultimate goal is to help our customers get peace of mind by handling all relevant details such as securing the right configuration, software setup, mounting, packaging, labeling etc. Ask for references from your industry.

- Outdoor open frame monitor 5.7" to 32"
- Different resolutions and aspect ratios available
- Resolution up to 1920 x 1080 Full HD
- High brightness 1000 to 1500 nits
- Chassis integration or rear mount
- With or without touch
- Resistive or PCAP multi touch
- IP65 front



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Open Frame Monitor Outdoor

- Large range of options for improved outdoor performance
- Optical bonding prevents condensation and improves sunlight readability
- Touch firmware optimised to outdoor use, e.g. rain mode and support of gloves
- Auto-brightness
- UV-filter
- Anti-reflection
- Tempered glass
- Customisation according to your requirements

Specifications

Model Type

Open frame monitor

Construction

Glass front - metal rear housing

Cooling

Fanless up to and included 27"

Active fan from 32"

Ingress Protection

IP65 front and IP50 Rear

Environment

Operating temperature	-20°C to +60°C
Storage temperature	-20°C to +60°C
Humidity	10% to 90% (non-condensing)



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Open Frame Monitor Outdoor

Certification

CE

Display

Sizes from 5.7" to 32"

Resolution from 640 x 480 up to 1920 x 1080 Full HD

Aspect ratio 4:3 / 5:3 / 5:4 / 16:9 / 16:10

Touch

Projected capacitive multi touch

Resistive touch from 5.7" up to 24"

Without touch

Optical bonding (optional)

Auto-brightness sensor (optional)

UV-filter (optional)

Anti-reflection surface treatment (optional)

Tempered glass (optional)

Touch firmware optimized to actual use (optional)

Brightness

High brightness 1000 to 1500 nits

Rear Input / Output

1 x VGA

Option for HDMI / display port / DVI

1 x USB 2.0 touch

OSD control panel

Power Supply

AC input / DC input

Mounting



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com

Open Frame Monitor Outdoor

Integration in chassis / rear mount

Warranty and After Sales Support

Standard 1 year (option for 3 years)



BLUE LINE
IT for Demanding Environments

Blue Line A/S | Kappa 8 | 8382 Hinnerup, Denmark
T +45 8678 5000 | www.blue-line.com